



# Ammonia Detector-Transmitter E2608-NH3-E




## Features

- Wall-mount or duct-mount version
- Industrial IP65 housing
- Two analog outputs settable to 4-20 mA or 0-10 V
- RS485 Modbus RTU digital interface
- Two relays for alarm / ventilation control
- Attached or remote sensor


## Specifications

Calibration	Ammonia NH <sub>3</sub>			
Sensor type	Electrochemical			
Sampling method	Diffusion			
Detection ranges, ppm	0...100	0...300	0...1000	0...5 000
Maximum overload, ppm	200	500	1500	10 000
Response time T90, s	< 75	< 75	< 75	< 120
Resolution, ppm	1			
Signal update	Every 1 second			
Sensor lifetime	> 2 years			
Maintenance interval	6 months			
Self-diagnostics	Full functionality check at start-up			
Warm-up time	≤ 1 min			
Power supply	12...36 VDC (default), 24 VAC or 230 VAC as options			
Power consumption	< 2 VA			
Digital interface	RS485, Modbus RTU protocol			
Analog outputs	2 × 4-20 mA / 0-10 V, user settable			
Output scale width	Recommended: 20-100% of the range; > 10 × resolution in any case			
Output relays	2 × SPST relays (closing contact), 250 VAC / 30 VDC, 5 A max			
Default alarm setpoints	For 0...100 ppm range: RE1 (LOW): set 25; release 20 ppm RE2 (HIGH): set 35; release 28 ppm For other ranges: defined by user within 5-95% of the detection range			
Enclosure	Grey ABS plastic, wall mount, protection class IP65			
Dimensions	H87 × W82 × D55 mm			
Remote sensor probe	Protection IP65, shielded cable default cable length 3.0 m			
Operating environment	Industrial indoor and outdoor locations			
Operating conditions	-40...+50°C, -30...+50°C (for 0...5 000 ppm), 15...90 %RH non-condensing; 0,9...1,1 atm; Explosion-safe areas; Non-aggressive atmosphere			
	<b>NOTE!</b> The device is not suitable for areas with constantly high ammonia concentration.			
	<b>NOTE!</b> We offer technical solutions for extreme humidity, please ask for more information.			

## Wall mount version

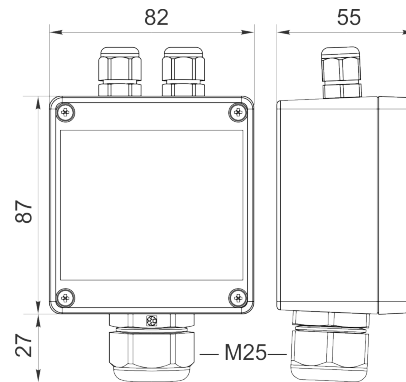


## Duct mount version

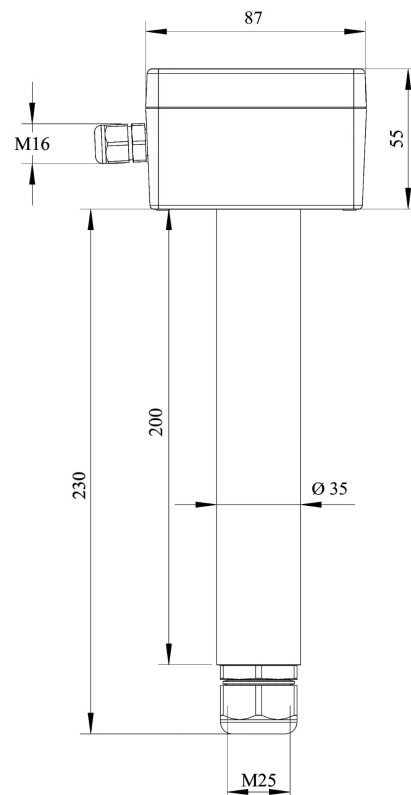


Ask for other versions or custom designed products



## Connection diagrams

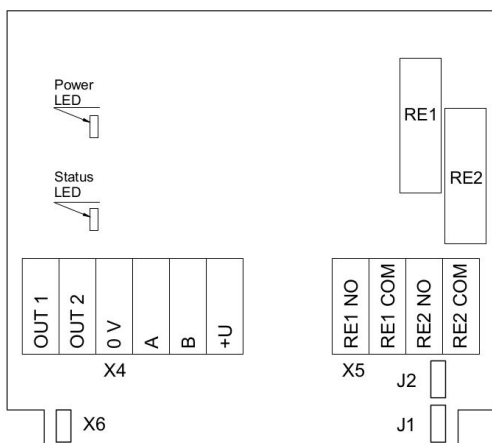

Version without PSU

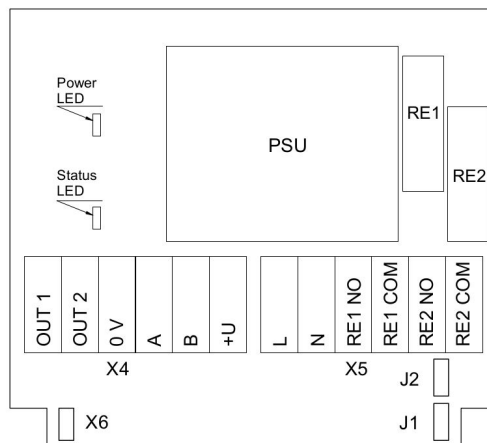

Version with PSU

### Jumpers

J1

OUT1 type (open: 4-20 mA; closed 0-10 V)

J2

OUT2 type (open: 4-20 mA; closed 0-10 V)

X6

Reset Modbus network parameters to default

### X4 terminals

OUT1

4-20 mA / 0-10 V output

OUT2

4-20 mA / 0-10 V output

0V

0 V / 24 VAC Neutral (optional)

A

RS485 A / Data +

B

RS485 B / Data -

+U

+24 VDC / 24 VAC Phase (optional)

### X5 terminals (optional)

L

90...265 VAC Phase

N

90...265 VAC Neutral

RE1 NO

Relay 1, normally open terminal

RE1 COM

Relay 1, common terminal


RE2 NO

Relay 2, normally open terminal

RE2 COM


Relay 2, common terminal

## Remote probe

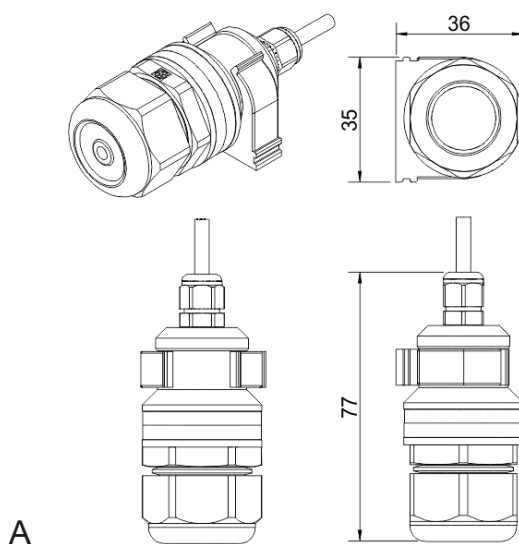

A

Wall mount remote probe with fixing clamp (default version)

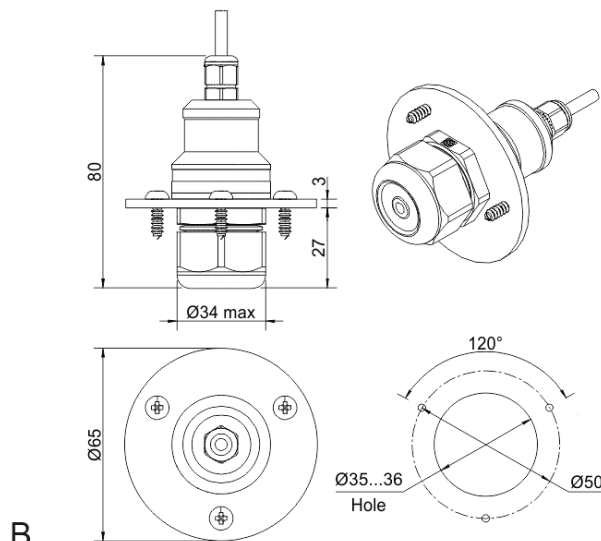

B

Remote probe with rubber flange and three self-tapping screws (on request)

